

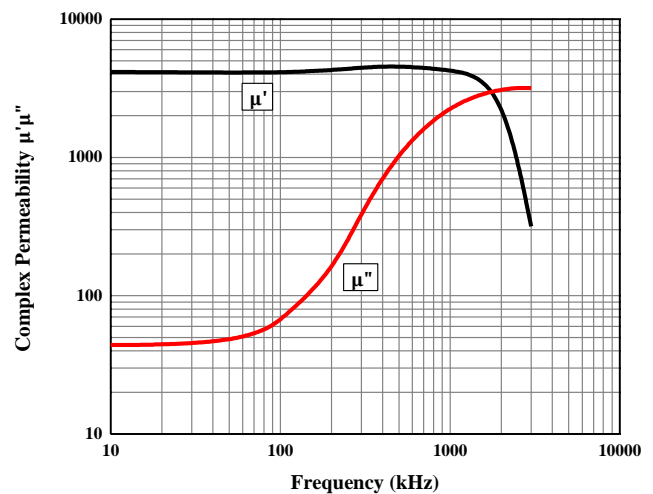
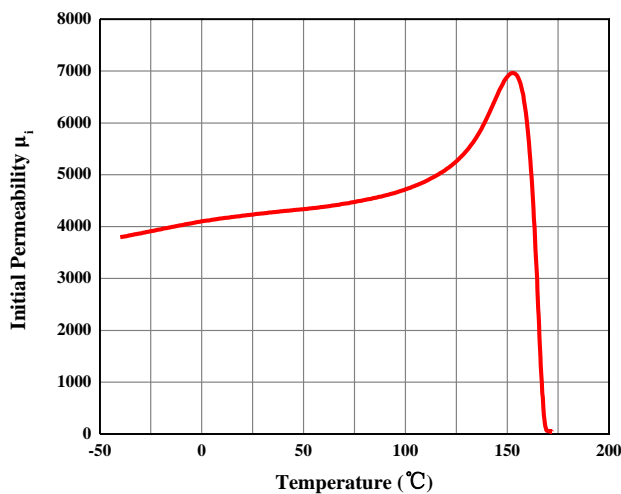
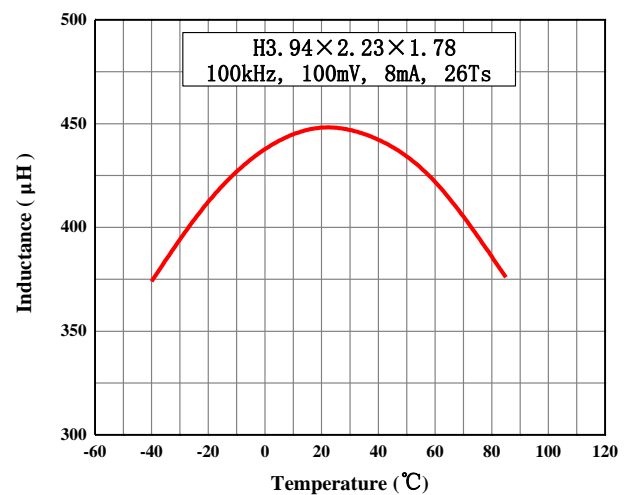
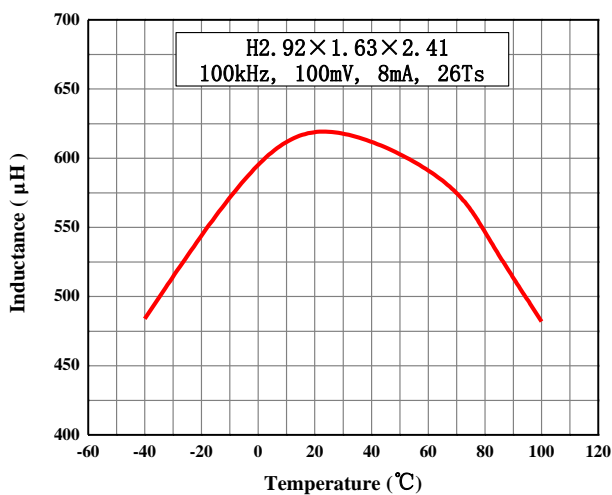
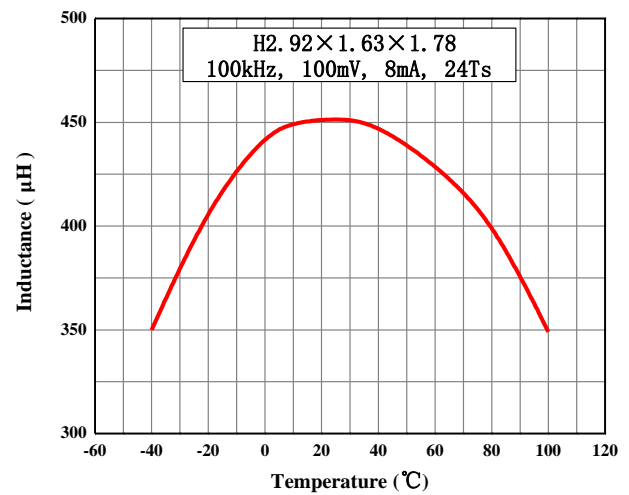
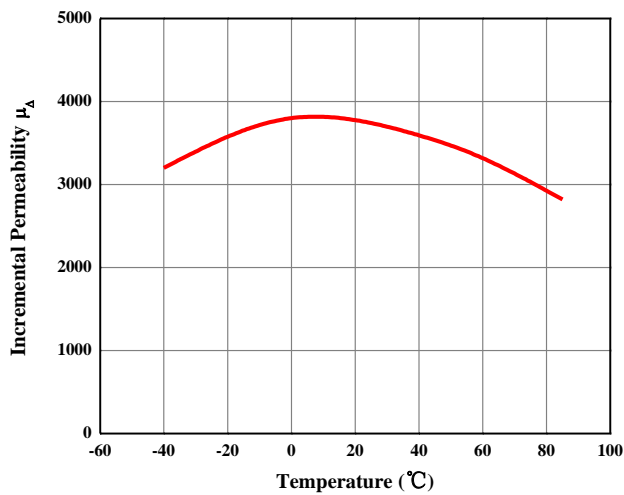


DMR73 材料特性

DMR73 Material Characteristics

特性 CHARACTERISTICS	测试条件 CONDITIONS		典型值 VALUE
初始磁导率 μ_i Initial Permeability	10kHz, B<0.25mT	25°C	4200±25%
饱和磁通密度 B_s (mT) Saturation Flux Density	50Hz, 1194A/m		25°C
剩磁 B_r (mT) Residual Flux Density			25°C
矫顽力 H_c (A/m) Coercive Force			25°C
比损耗因子 $\tan\delta/\mu_i$ ($\times 10^{-6}$) Relative Loss Factor	10kHz, 0.25mT	25°C	<3.5
	100kHz, 0.25mT		<10
居里温度 T_c (°C) Curie Temperature	10kHz, B<0.25mT		>160
密度 d (g/cm ³) Density	25°C		4.9

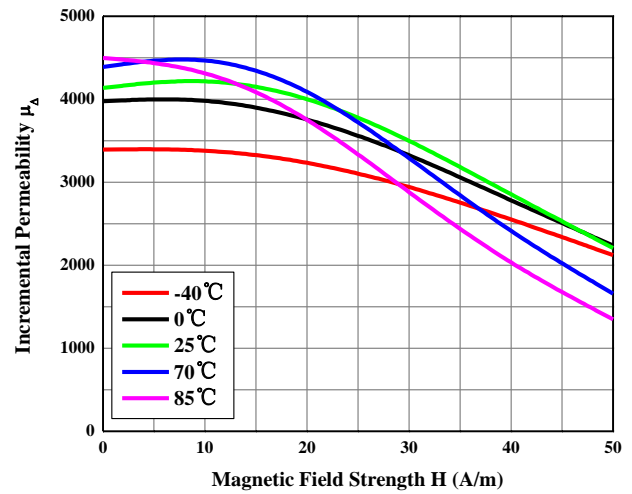

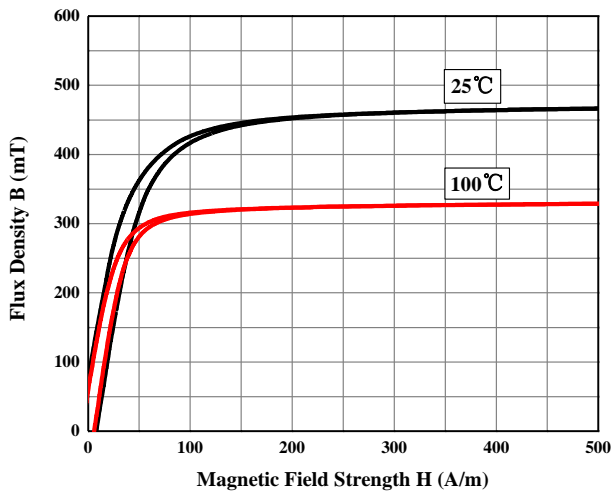

以上数据是根据标准样环 $\phi 25 \times \phi 15 \times 8$ 获得的典型数据，有关产品的具体性能会在此基础上有所调整。

The above typical data are calculated from the standard toroid core. Specific performance of the product will be adjusted on this basis.